

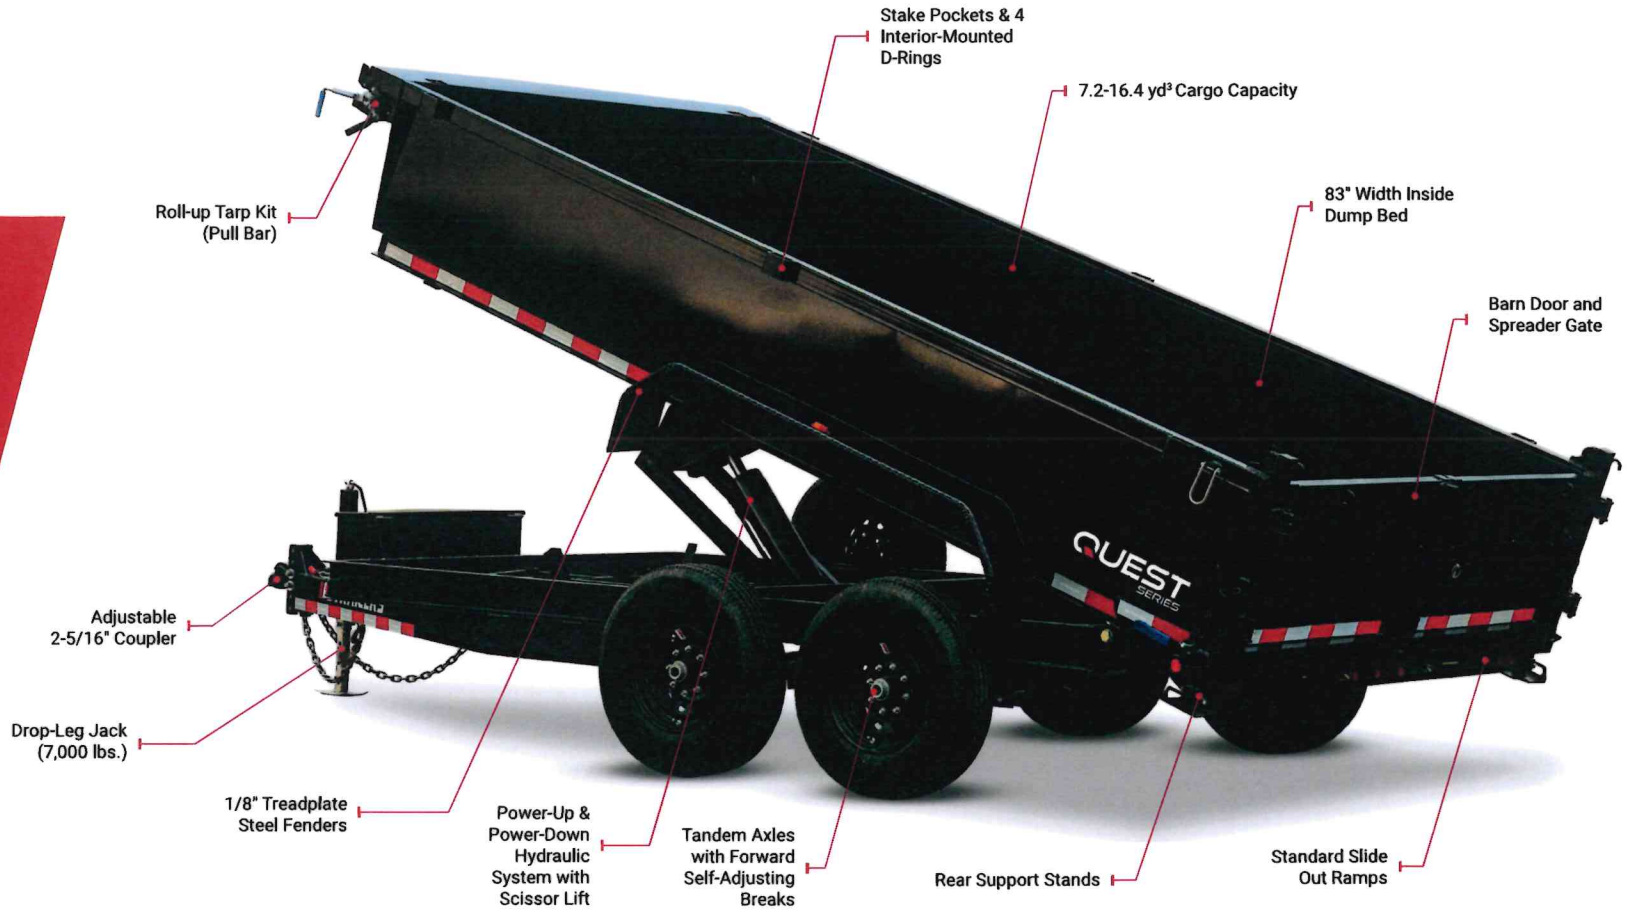
D7 14K DUMP

STANDARD CONFIGURATION SPECS

THESE ARE THE DEFAULT SPECS THAT ARE INCLUDED IN THE BASE CONFIGURATION OF THIS MODEL.

 INSIDE BED WIDTH: 83"	 DECK HEIGHT: 30"	 CARGO CAPACITY: 7.2-16.4yd³	 Dump Angle: 40°
 LENGTH: 14'	 COUPLERS: Bumper Pull & Pintle	 AXLES: Tandem (2 x 7,000 lbs.)	 Choose the optional board brackets to provide extra height as well as an additional layer of protection for the dump.
 GVWR: 14,000 lbs.	 LOAD CAPACITY: 10,340 lbs.	 DUMP SIDES HEIGHT: 24" (optional 48" sides)	

AVAILABLE WITH 4' SIDES

With standard tarp system the D7 is ready to help you keep your load contained.

STANDARD TARP AND TARP SHROUD



Forward Self Adjusting Brakes help maximize your time on the road with optimal performance.

SELF-ADJUSTING BRAKES



Standard Slide-In Ramps, Stabilizer Jacks, and D-Rings make it easy to load and secure the equipment you need for your job.

EQUIPMENT LOADING READY



The Scissor-Lift Hydraulic System provides efficient lifting capabilities, a stable lifting platform and power-up, power-down, and gravity down functionality for quick dump cycles.

SCISSOR LIFT WITH CYLINDER