

VBX+))) Marking a New Era in Spreader Technology



Introducing the VBX+ | Where Innovation Meets Performance

Get ready to revolutionize your snow and ice management game with the VBX+, the dawn of spreader technology from BOSS. Designed for the modern contractor, the VBX+ is packed with smart features that put you in control like never before, allowing precise material distribution and seamless job site tracking on the controller. Say goodbye to downtime with easy-to-maintain components and unrivaled power and performance. With sleek LED lighting, advanced safety features, choice of auger or pintle chain, and intuitive design enhancements, the VBX+ will do Whatever It Takes to Keep 'Em Open when winter weather strikes. Elevate your operations, embrace the future, and experience the VBX+.

Standard Smart Features



⊗ Job Tracking

⊗ Future-Ready

⊗ Standard Rate Control

⊗ Simplified Material Calibration Adjustment

⊗ Controller Operated LED Lighting

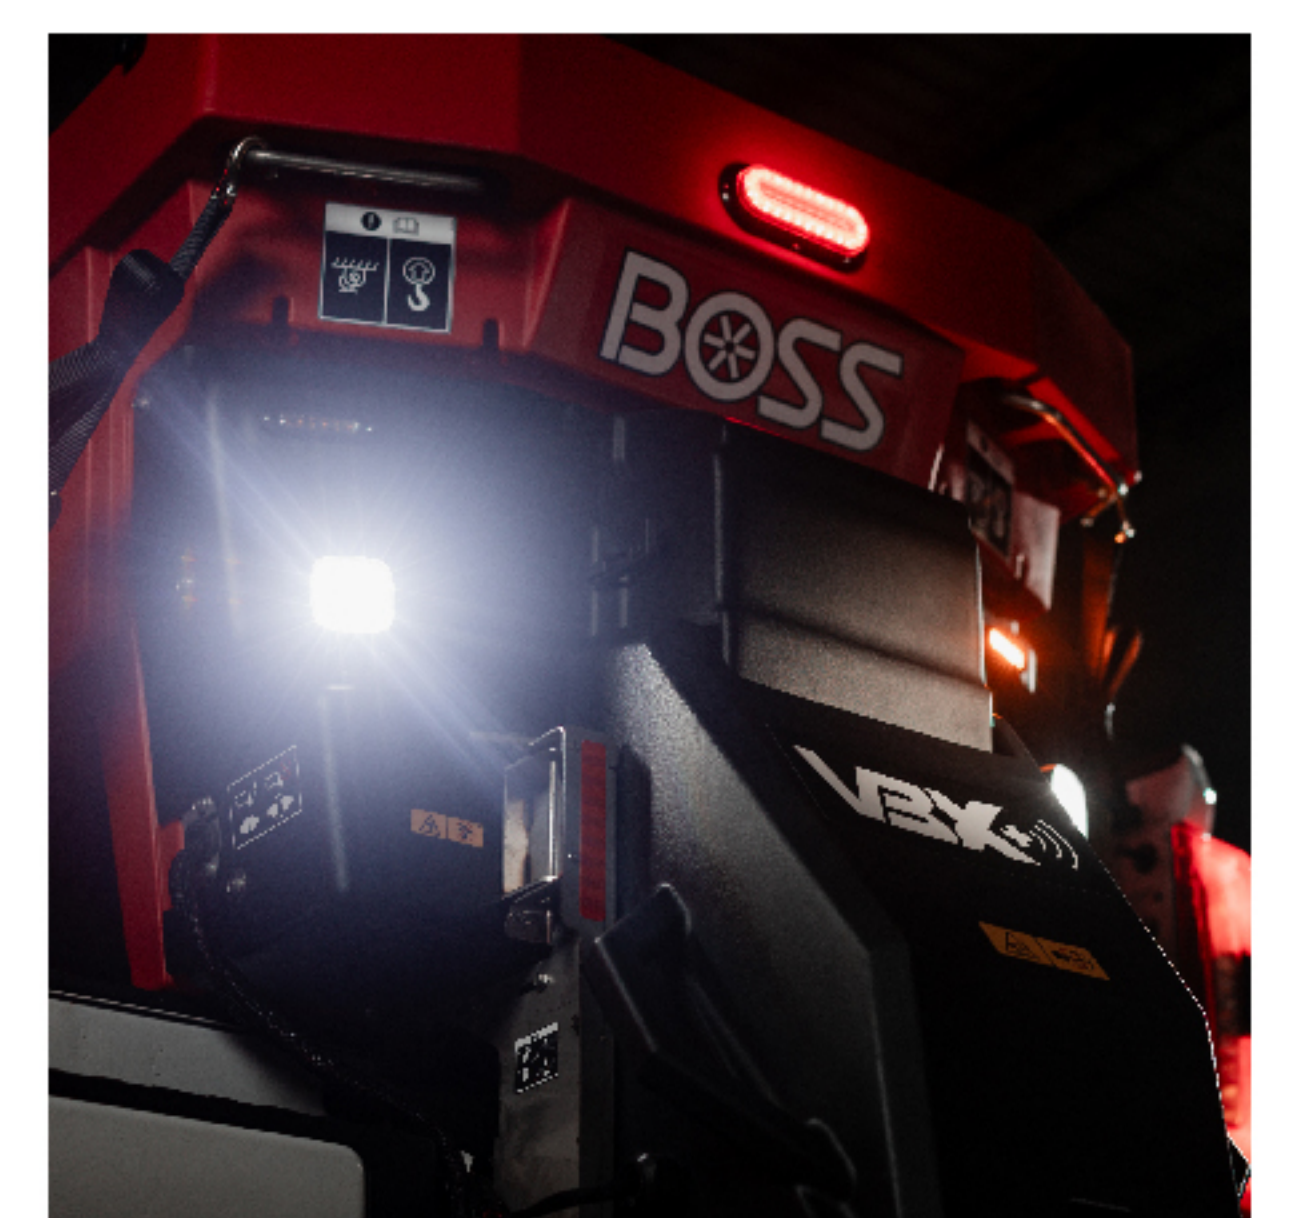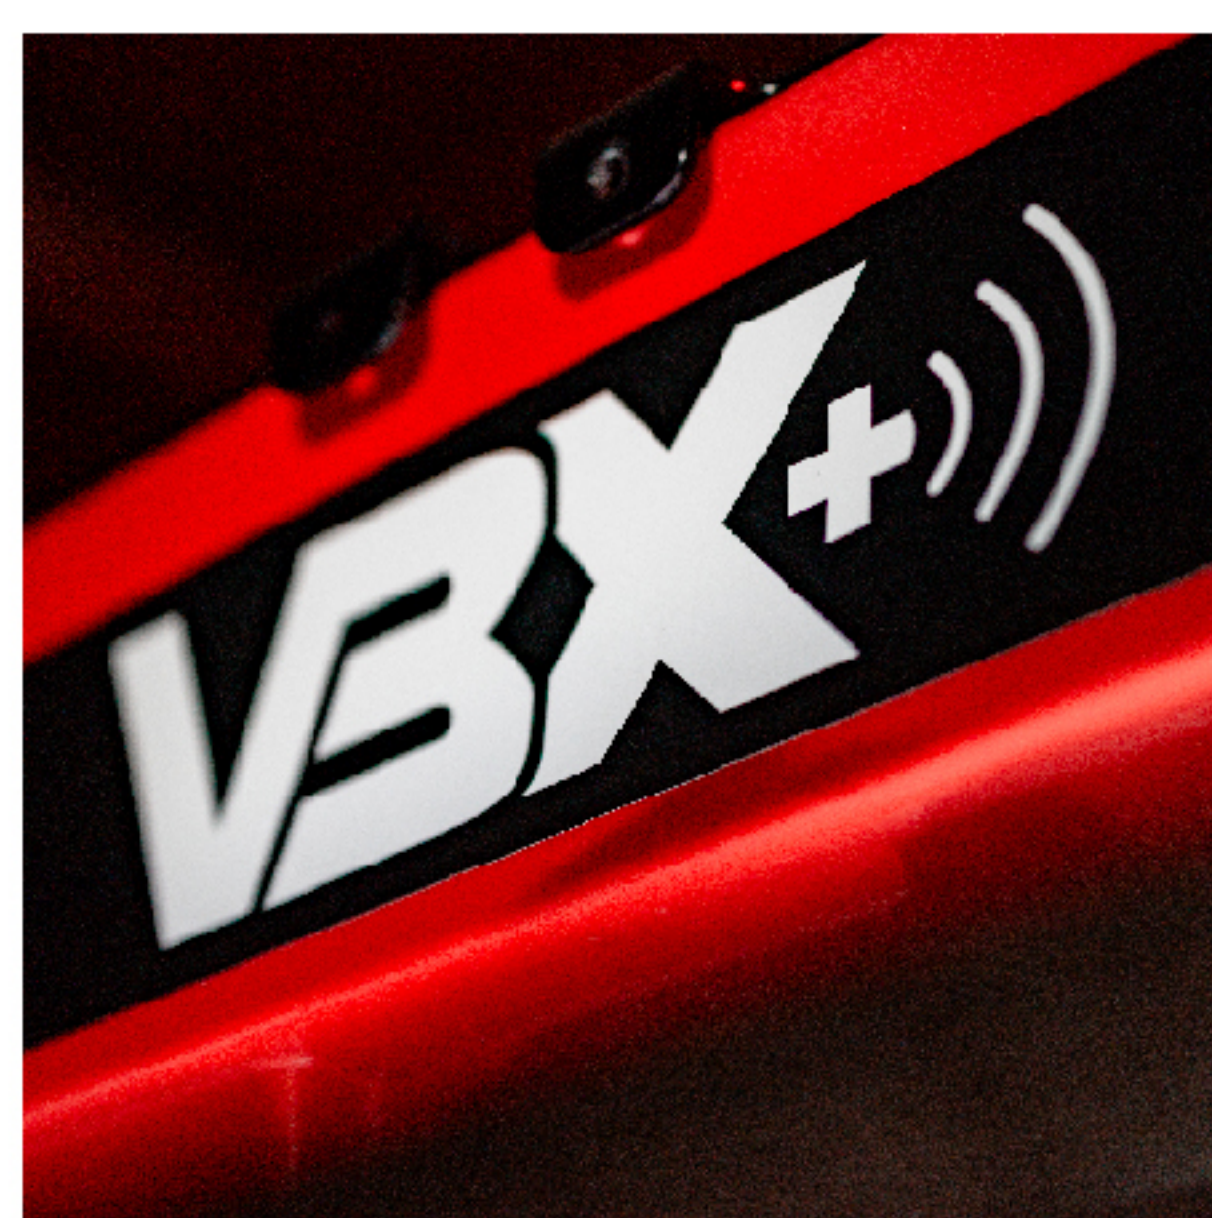

Additional Standard Features

⊗ Easy Access Hatch

⊗ Upgraded Motor Performance

⊗ Remote Grease Zerks

⊗ Choice of Auger or Pintle Chain System

⊗ Reinforced Poly Hopper

⊗ Urethane Spinner

⊗ Standard Tarp System

⊗ Advanced Auger System

⊗ For complete information please scan the QR Code



Specifications	VBX+ 1.5 YD Auger Pintle	VBX+ 2 YD Auger Pintle	VBX+ 3 YD Auger Pintle
Capacity	Cubic yd 1.5/Cubic m 1.15	Cubic yd 2/Cubic m 1.53	Cubic yd 3/Cubic m 2.3
Chute Construction	Polyethylene with Stainless Steel Frame		
Control	Dual Variable Speed Control		
Deflector	Standard		
Display Type	LCD Display Controller		
Feed Mechanism	6" (15 cm) OD x 9" (23 cm) Pitch Full Length Auger - Auger 14" (36 cm) Wide Pintle Chain - Pintle		
Feed Motor	3/4 HP Feed Motor		
Gearbox	Planetary Worm 91:1 - Auger Planetary Worm 137:1 - Pintle		
Grease Hoses	Standard		
Hopper Construction	3/16" (0.5 cm) Double Wall Polyethylene Hopper		
Hopper Cover	VCP Tarp w/ integral tie-downs		
Hopper Height	38 in/96.52 cm	38 in/96.52 cm	49 in/124.46 cm
Hopper Length	78 in/198 cm	96 in/244 cm	108 in/272 cm
Hopper Width	48.25 in/122.56 cm 48.25 in/122.56 cm	48.25 in/122.56 cm 48.25 in/121.92 cm	48 in/121.92 cm
Inverted V Baffle	Standard - Auger Optional - Pintle		
LED CHSML	Standard		
LED Work Lights	Standard (Two)		
Max Feed Rate	150 lbs (70 kg) per minute - Auger 240 lbs (110 kg) per minute - Pintle		
Minimum Bed Length	66 in (168 cm)	78 in (198 cm)	96 in (243.8 cm)
Smart Compatible	Standard		
Spinner	15 in (38.1 cm) Diameter Poly Spinner		
Spinner Assembly	Easily Removable/Swing Out and Height Adjustable		
Spinner Gearmotor	1/2 HP Spinner Gearmotor (Located above spinner)		
Spreader Overall Length	93.5 in/237 cm	115 in/292 cm	122 in/309 cm
Spreader Switches	Two Dual Function Rocker Switches, E-Stop		
Spreading Width	8 ft - 40 ft (2.4 m - 12 m) Dry free-flowing material		
Tie-Down Kit	Standard		
Top Screen	Standard		
Trough	11 ga. Stainless Steel		
Vehicle Application	3/4 T & 1 T	3/4 T & 1 T	15,000+ GVWR
Vehicle to Spreader Connector	Custom Sealed and Overmolded Power & Controls Connector		
Vibrator	Standard (Dual Vibrator) - Auger Optional - Pintle		
Weight	640 lbs/290 kg 680 lbs/308 kg	690 lbs/313 kg 730 lbs/331 kg	810 lbs/367 kg 840 lbs/381 kg