


T6 6" CHANNEL EQUIPMENT TILT

STANDARD CONFIGURATION SPECS

THESE ARE THE DEFAULT SPECS THAT ARE INCLUDED IN THE BASE CONFIGURATION OF THIS MODEL.

 Deck Width: 83" Wide Tilt Deck (75" Between Fenders)	 Deck Height: 21"	 Axles: Tandem Torsion (2 x 7,000 lb.)	 Choose the optional Blackwood Pro decking for added durability and grip when wet.
 Length: 16' - 24'	 Couplers: Bumper Pull, Gooseneck, & Pintle	 Load Capacity: 10,940 - 10,500 lbs.	
 GVWR: 14,000 lbs.	 Weight: 3,060 - 3,950 lbs.	 Tilt Angle: 11°	

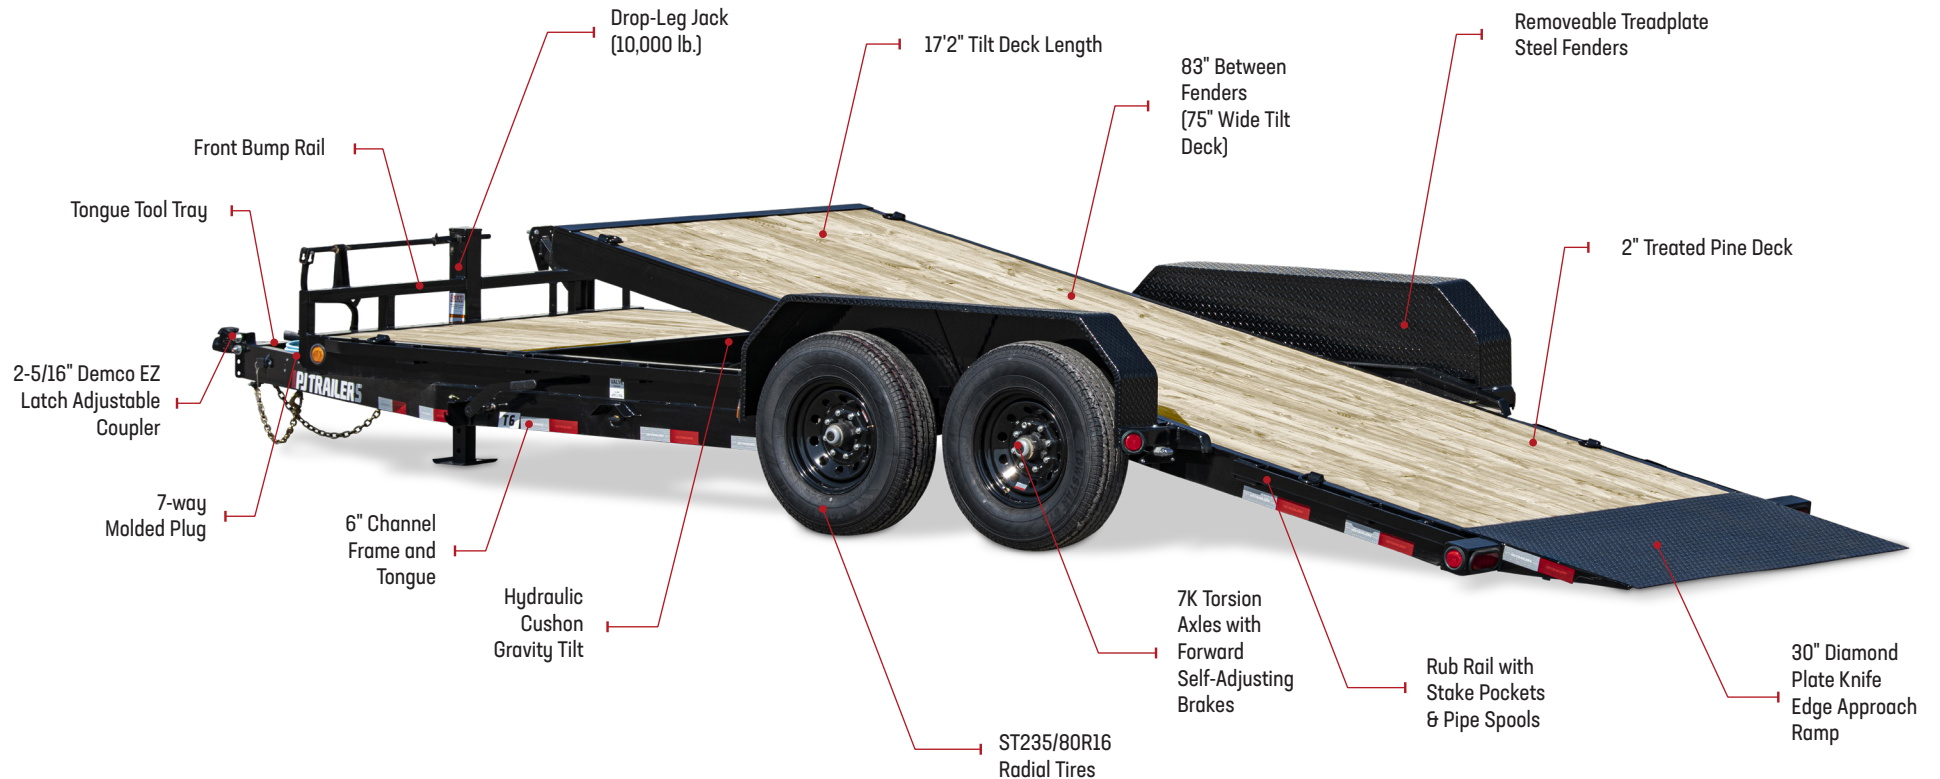

Our Gravity Tilt uses a hydraulic cylinder and proportioning valve to control the rate of tilt bed movement for additional safety when loading and unloading.

HYDRAULIC CUSHIONED GRAVITY TILT



Simplify brake maintenance with our Forward Self-Adjusting Brakes, engineered to self-adjust for optimal braking performance. This innovative system reduces downtime and ensures consistent stopping power.

FORWARD SELF-ADJUSTING BRAKES



Benefit from enhanced cargo securement with our standard Rubrail, stake pockets and pipe spools. In addition to the built-in stake pockets, the Rubrail provides extra attachment points for securing your load. Customize your trailer further by adding optional D-rings.

CARGO CONTROL STANDARD



Our 30" Diamond plate knife edge tail makes it super-easy to load low clearance equipment like scissor lifts and fork lifts.

KNIFE EDGE TAIL

PJTRAILERS

Visit pjtrailers.com for a complete list of trailer options.