



❄️ **Heavy-Duty Stainless Steel Construction**

Built for long-term durability in harsh municipal and commercial environments.

❄️ **High-Output Pintle Chain**

Delivers consistent, high material flow rates up to 425 lbs. per minute.

❄️ **4-Yard Base Hopper Capacity**

Optional 1-yard and 2-yard bolt-on extensions allow fleets to scale capacity.

❄️ **Cold Front Technology Electrical System**

- Shares platform with VBX+ display module and truck plows.
- Standard rate control and material tracking for up to 10 job sites.
- **OPTIONAL** Auto Spread Control automatically matches material flow to your vehicle speed for precise, consistent spreading


❄️ **Flip-Up Spinner Assembly**

Designed for easy maintenance, service access, trailering and off-season storage.

❄️ **Optimized Truck Compatibility**

Designed to fit common flatbeds and dump bodies.

CAPACITY: 4 CU YD | 5 CU YD | 6 CU YD

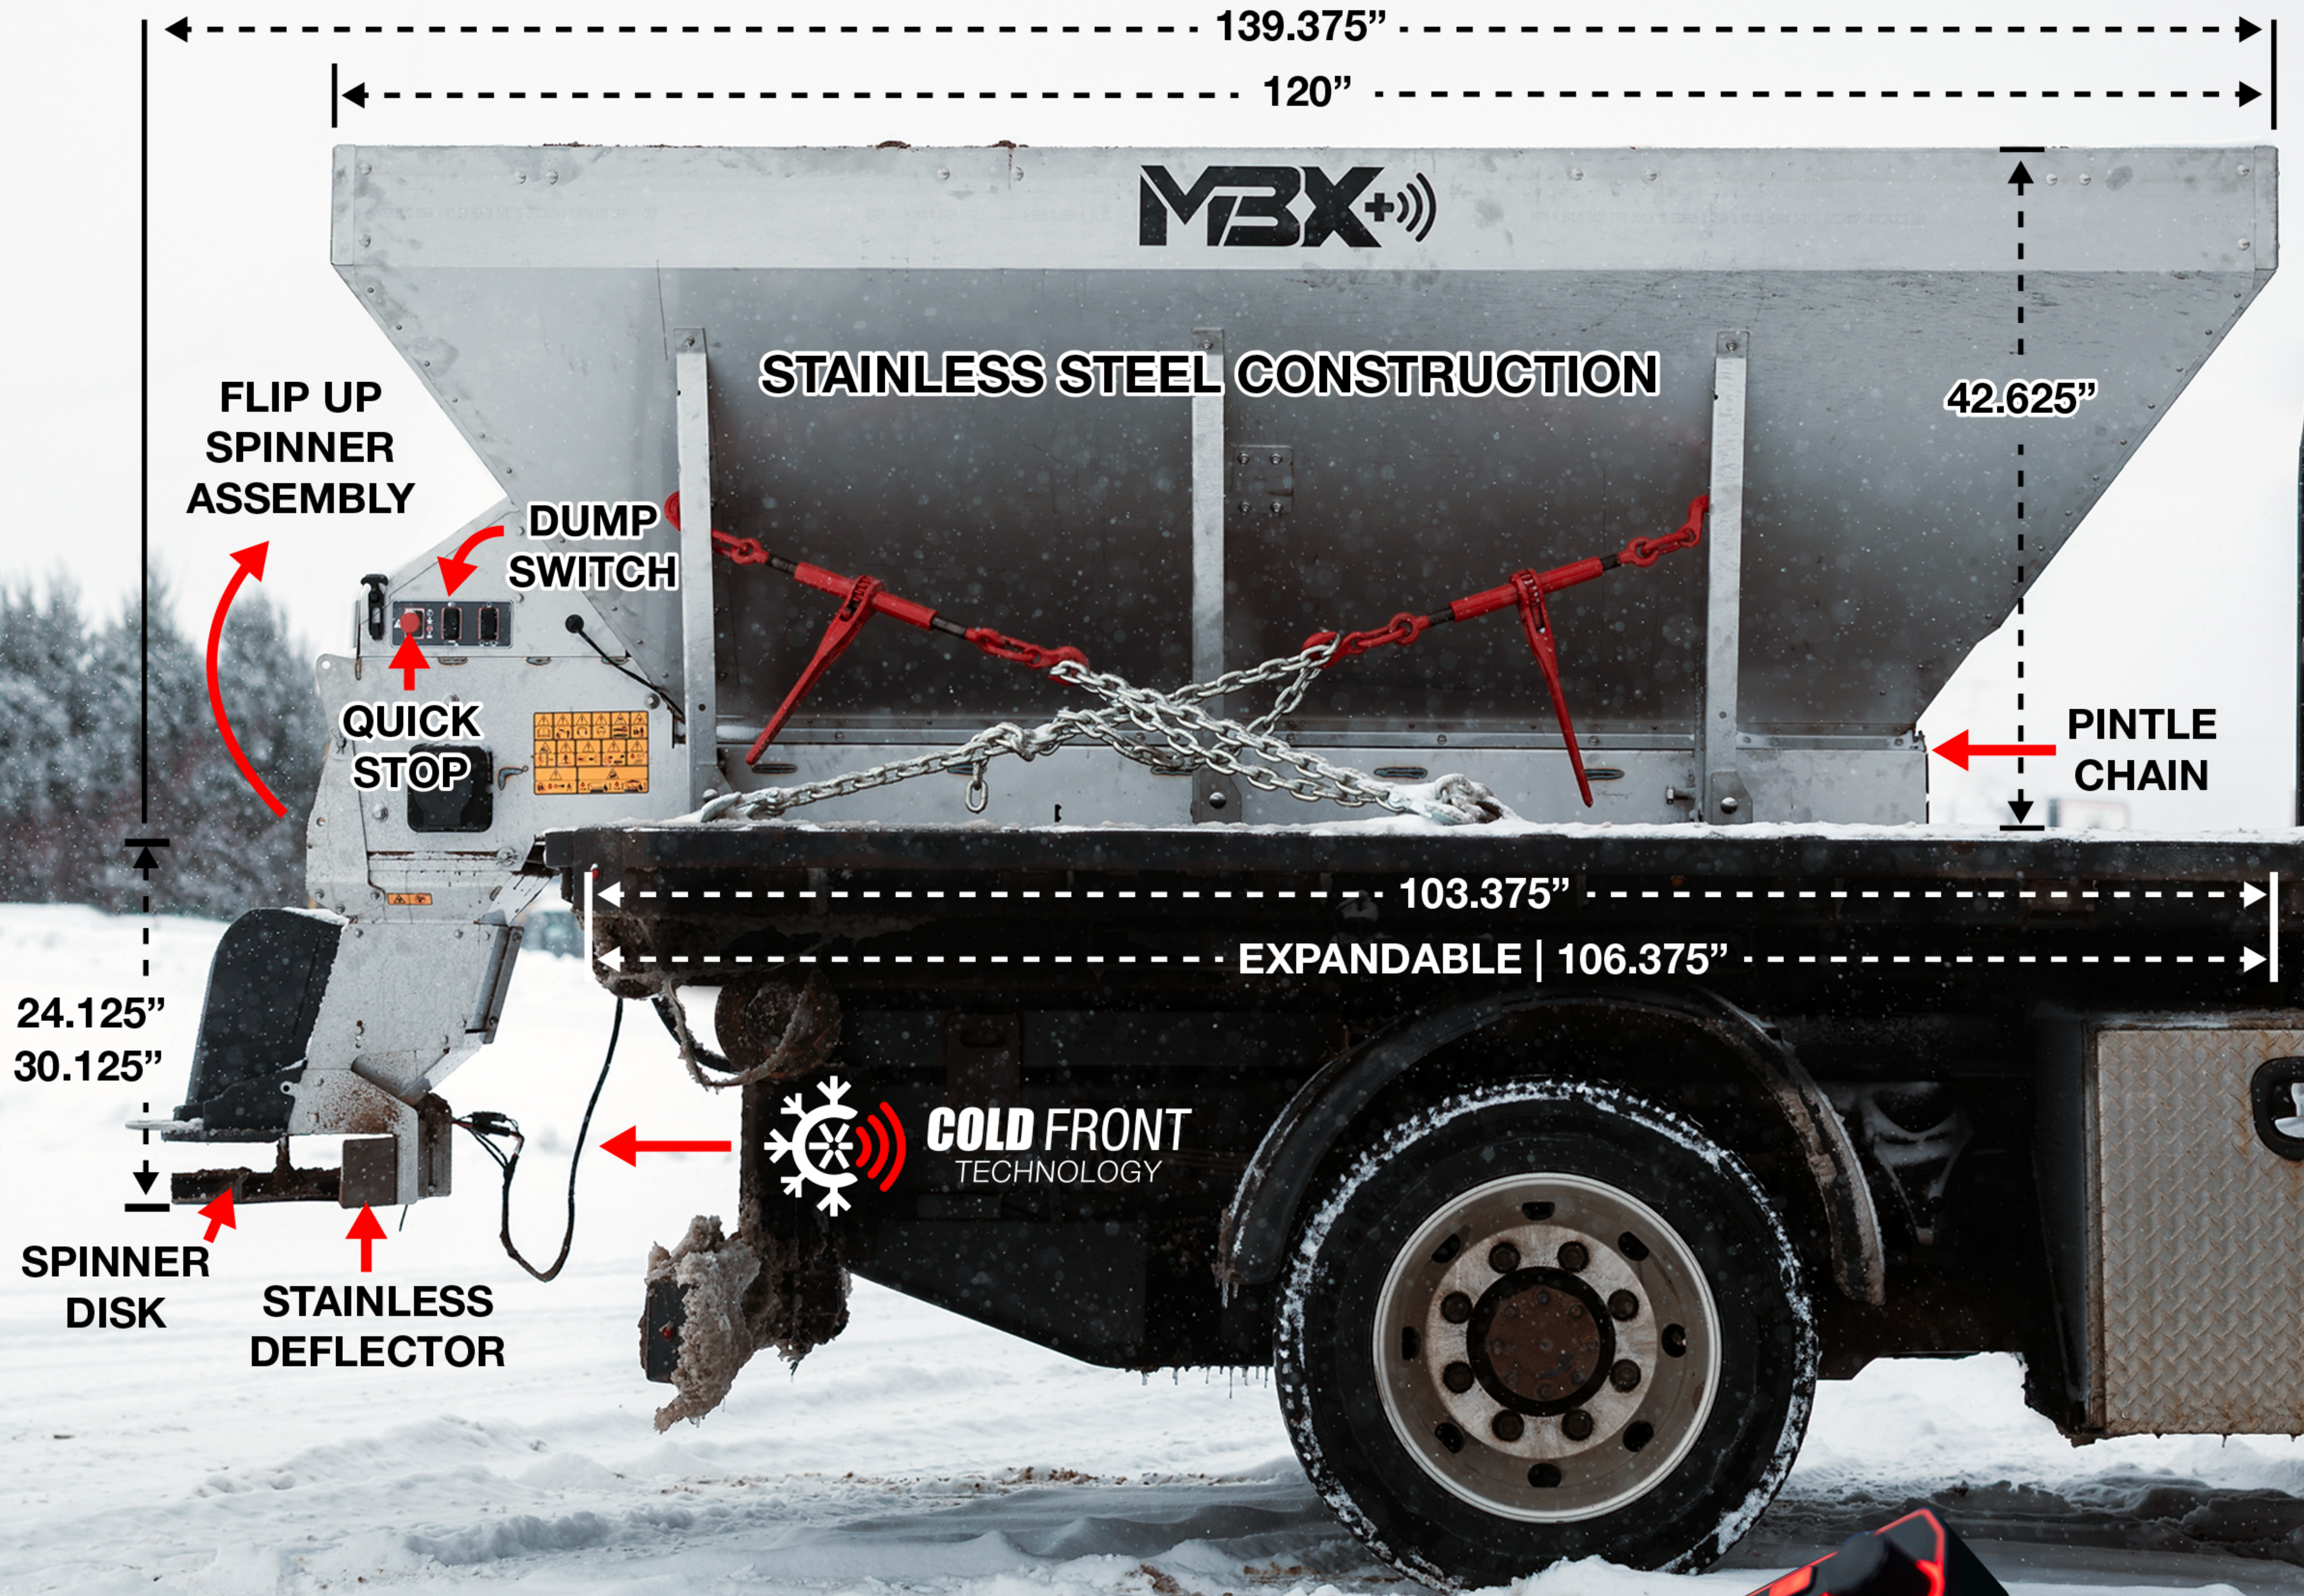

- ⊗ Dual Variable ⊗ Material Tracking
- ⊗ Rate Control ⊗ Auto Spread Optional



Additional Features

Capacity	4 cu yd *5 cu yd *6 cu yd
Connectivity	Smart Compatible
Gearbox	Cast Iron Housing, Planetary Worm 137:1
LED CHMSL	Standard
Max Feed Rate	425 lbs/min
Material Compatibility	Salt, Sand, Salt+Sand, Gravel
Spreading Width	8 to 40' cast (Salt)
Empty Weight	1025 lbs

*Optional 1-yard and 2-yard bolt-on extensions

Optional Accessories

- Vibrator**
- Grease Hoses**
- Inverted-V**
- Work Lights**
- Strobe/Warning Lights**
- Clean Out Tray**

Scan To
Learn More

