



LD LOW-PRO FLATDECK WITH DUALS

The reimagined LD is the latest version of one of our best-selling trailers and now includes even more technology and innovation that make it ideal for heavy construction and hotshotting. We've redesigned some standard features for improved performance and looks, including a new gooseneck that redistributes stress points, a first-of-its-kind coupler that saves you time, an adjustable suspension that is easier to maintain, and much more! Plus, you can easily customize any LD model with your favorite PJ options for a uniquely equipped trailer that fits your heavy hauling needs.

+ Visit pjtrailers.com for a complete list of trailer options @ <https://pjtr.com/LD>




LD LOW-PRO FLATDECK WITH DUALS


STANDARD FEATURES

THESE ARE THE DEFAULT FEATURES THAT ARE INCLUDED IN THE BASE CONFIGURATION OF THIS MODEL.

Lengths: 20' - 44'	Deck Height: 33"	GVWR: 25,000 lbs.	Weight: 5,630 - 8,750 lbs.
Deck Width: 102"	Couplers: Gooseneck	Load Capacity: 19,370 - 21,250 lbs.	Choose optional Monster Ramps for easier loading and unloading

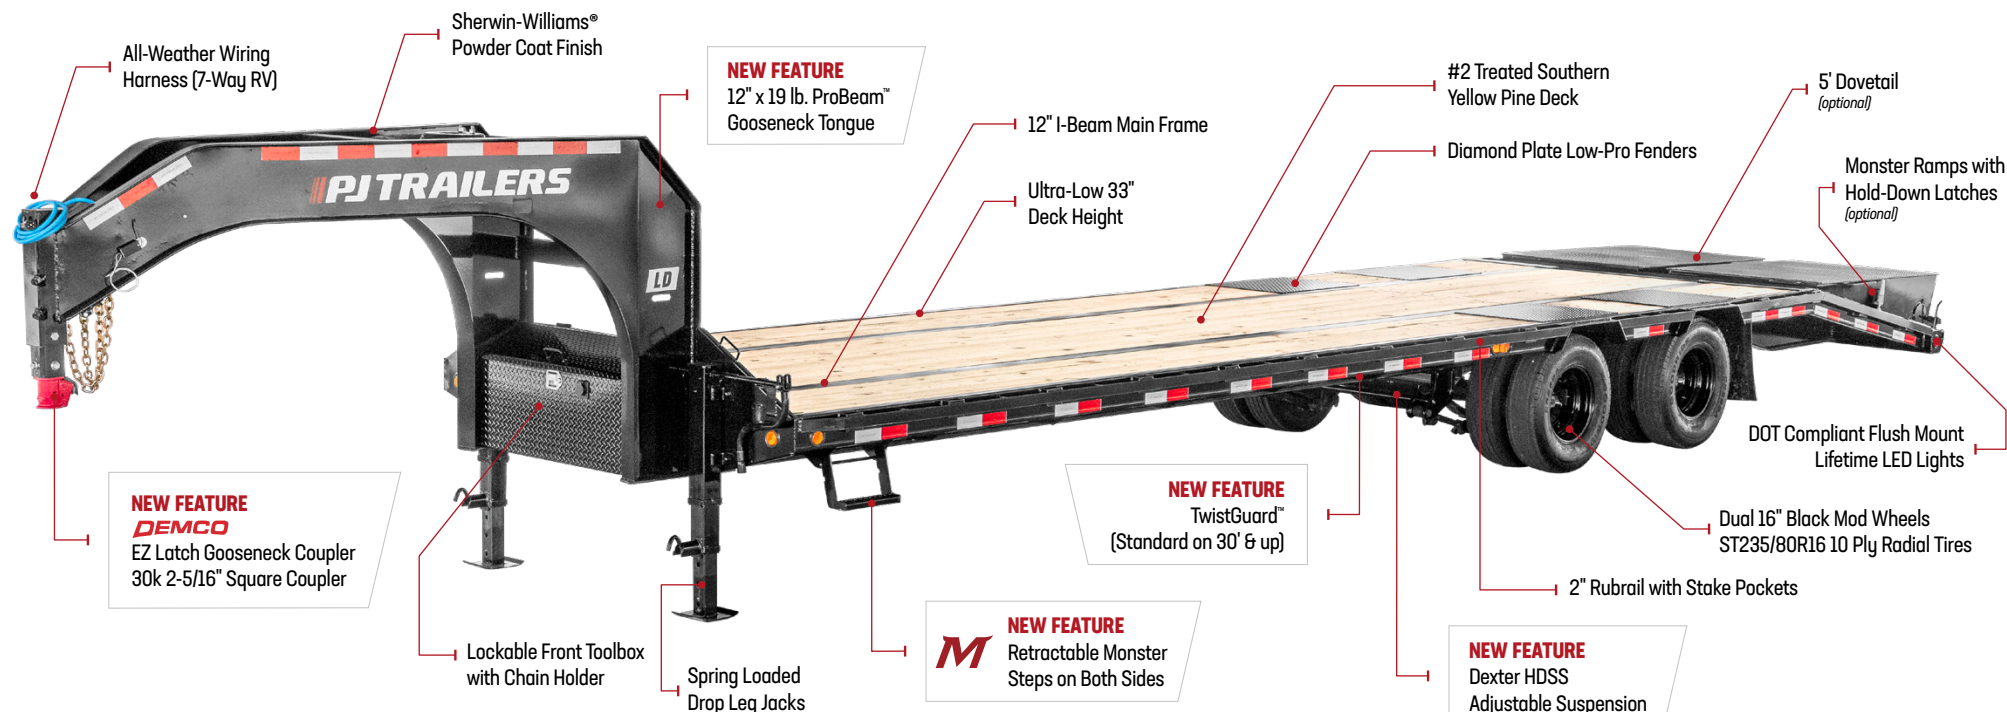

25K BASE GVWR	102" DECK WIDTH	12" I-BEAM TONGUE (PROBEAM™)	2 5/16" BALL COUPLER	8" CHANNEL SLIDE-IN RAMPS	33" DECK HEIGHT	10 PLY ST235/80R16 RADIAL TIRES	10 K SPRING AXLE	16" CROSSMEMBER CENTERS	OPTIONAL 5' DOVETAIL	DIAMOND PLATE LOW-PRO FENDERS	AVERY DENNISON DOT COMPLIANT REFLECTIVE TAPE	7-WAY RV PLUG	LIFETIME LED LIGHTS	POWDER COAT FINISH
-------------------------	---------------------------	--	--------------------------------	------------------------------	---------------------------	--	---------------------	--------------------------------------	-------------------------	----------------------------------	--	---------------	------------------------	-----------------------

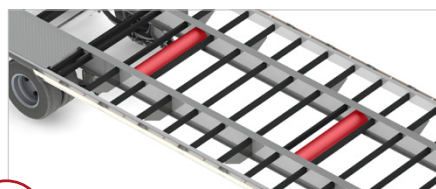


TWISTGUARD™ FRAME DESIGN

The TwistGuard™ provides T-shaped intersecting pipe supports to reduce frame twist and improve torque control. It is standard on models 30' and up or optional on shorter lengths.




FORMED PROBEAM™ GOOSENECK

The new formed ProBeam™ gooseneck features a sleek new shape, is constructed from a single piece of heavy-duty steel, and has been redesigned to help reduce weight and redistribute stress points.

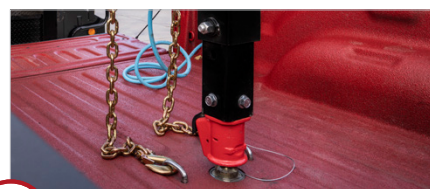

DEMCO EZ LATCH GOOSENECK COUPLER

The Demco EZ Latch Gooseneck Coupler is the first-of-its-kind, offering the reliability of Demco's EZ Latch system together with a custom housing for the ultimate in convenience to hitch up and go.

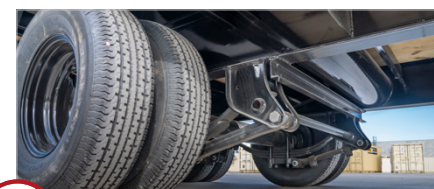

HEAVY DUTY ADJUSTABLE SUSPENSION

The new adjustable suspension increases longevity and performance, is easier to maintain, and allows for adjustments when you need them.

PJTRAILERS

+ Visit pjtrailers.com for a complete list of trailer options @ <https://pjtrailers.com>

LD LOW-PRO FLATDECK WITH DUALS

STANDARD CONFIGURATION SPECS

THESE ARE THE DEFAULT SPECS THAT ARE INCLUDED IN THE BASE CONFIGURATION OF THIS MODEL.

TRAILER SPECS

DIMENSIONS

Lengths	20', 22', 24', 25', 26', 28', 30', 32', 34', 35', 36', 38', 40', 42', 44'
Deck Width	102"
Deck Height	33"

WEIGHT RATINGS

GVWR	25,000 lbs.
GAWR	10,000 lb. x (2) GAWR

FINISH

Type	Powder Coat
Prep	Acid Wash, Sandblast
Colors	Black, Desert Tan, Grey, Red, Tractor Orange, White

WARRANTY

Axle Warranty	5-Year Axle Warranty
Trailer Warranty	Three (3) Year Frame/One (1) Year Limited Warranty

TONGUE

COUPLER

Standard Coupler	GN 2-5/16" Square (30,000 lb.) w/ Toolbox
------------------	---

JACKS

Front Jack	Spring Loaded Drop Leg Jacks (12,000 lb.)
------------	---

TOOLBOX

Toolbox	Lockable Front Toolbox w/ Chain Holder
---------	--

TONGUE

Gooseneck	12" x 19 lb. I-Beam Tongue (ProBeam™)
-----------	---------------------------------------

LENGTH

Gooseneck	8' 11" (107")
-----------	---------------

SAFETY SYSTEM

Safety Chains	3/8" Grade 70 Safety Chain w/ Clevis Hook (2 Each)
Breakaway System	Defender 2 Electric Breakaway System w/ Charger
Reflective Tape	DOT Compliant Reflective Tape

CHASSIS

DECK

Flooring	#2 Treated Southern Yellow Pine Lumber
Frame	2" x 6" x 1/8" Square Tubing Outer Deck Frame

SIDE

Step	Retractable Monster Step on Both Sides
Side Rail	2" Rubrail w/ Pipe Spools
Stake Pockets	3-5/8" x 1-1/2" (ID) Stake Pockets
Fenders	Diamond Plate Low-Pro Fenders

FRAME

Type	I-Beam Main Frame
Size	12" x 19 lb.
Support	TwistGuard™ (Standard on 30' and Up)

CROSSMEMBERS

Size	3"
Type	Channel
Spacing	16"

REAR

Tail	Straight Deck
Ramps	8' Slide-In Channel Ramps

ESTIMATED WEIGHTS

LENGTH	ESTIMATED BASE WEIGHT†
20'	5,630 lbs. / 2,559 kg
22'	5,890 lbs. / 2,677 kg
24'	6,130 lbs. / 2,786 kg
26'	6,410 lbs. / 2,914 kg
28'	6,670 lbs. / 3,032 kg
30'	6,930 lbs. / 3,150 kg
32'	7,190 lbs. / 3,268 kg
34'	7,450 lbs. / 3,386 kg
36'	7,710 lbs. / 3,505 kg
38'	7,970 lbs. / 3,623 kg
40'	8,230 lbs. / 3,741 kg
42'	8,490 lbs. / 3,859 kg
44'	8,750 lbs. / 3,977 kg

ELECTRICAL & LIGHTING

ELECTRICAL

Wiring Harness	All-Weather Wiring Harness (7-Way RV)
----------------	---------------------------------------

LIGHTING

Side Markers	Amber Side Turn Flashers
Rear Lights	DOT Compliant Flush Mount Lifetime LED Lights

† Weights are estimated for base trailer only. We make no guarantee regarding the accuracy of estimated weights.

RUNNING GEAR

TIRES

Type	Radial Tires
Size	ST235/80R16
Ply	10 Ply
Rating	3,080 lbs.
Rims	Dual 16" Black Mod Wheels
Spare	Spare Tire & Mount

SUSPENSION

Axle Type	Spring
Axle Count	2
Axle Rating	10,000 lb. Axles (Dexter)
Brakes	Electric
Suspension Type	HDSS Adjustable Suspension
Axle Warranty	5-Year Dexter Axle Warranty

PJ TRAILERS

+ Visit [pjtrailers.com](https://pjt.rs/LD) for a complete list of trailer options @ <https://pjt.rs/LD>