

14GN SINGLE WHEEL TANDEM AXLE GOOSENECK


G.V.W.R.	15,900#	AXLE	(2) 7,000# Quick Lubricating w/ Electric Brakes
G.A.W.R. (Ea. Axle)	7,000#	SUSPENSION	Multi-Leaf Slipper Spring w/Equalizer
COUPLER	2-5/16" Ball Adjustable Pipe	TIRE	ST235/80 R-16 Load Range E
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL	16" x 6"; Black Mod, 8 Bolt
JACKS	Dual 12,000# Drop Leg Side Wind (Bolted On)	FLOOR	2" Treated Lumber
NECK	12" I-Beam, 14#	LIGHTS	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
FRAME	12" I-Beam, 14# (16# on 28' Trailer or longer)	ELEC. PLUG	7-Way RV
CROSSMEMBERS	3" Channel	FINISH (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
SIDE RAILS	5" Channel w/ Rub Rail, Stakepockets & Chain Spools		
DOVETAIL	5' Cleated Dovetail w/ 5' Double Hinged, Spring-Assited Flip-Over Ramps	FINISH	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.

* Douglas Fir Available from Caldwell, ID Facility Only

STANDARD FEATURES

- 2-5/16" Demco EZ Latch Gooseneck Coupler (30K)
- Dual 12,000# Drop Leg Jacks (Bolted on) w/ Greasable Handle
- 102" Overall Width
- Low Profile, Pierced-Beam Frame Design
- Front Lockable Toolbox Uprights w/ Chain Holder
- (2) Retractable Side Bed Steps & Handles
- Work Light Package w/ Step Illumination
- 3/8" Heavy Duty Rub Rail
- Stakepockets Along Sides, 24" On Center
- 1-1/4" Pipe Chain Spools Between Tie Down Pockets
- Quick Lubricating Hubs
- Premium Brand Axles
- Forward Self-Adjusting Electric Brakes on All Hubs
- Cambered Axles
- Grommet Mount Sealed Lighting
- L.E.D. Lighting Package
- Sealed, Modular Wiring Harness
- Spare Tire Mount (Top of Neck)
- 5' Dovetail w/ 5' Double Hinged Spring Assist Flip-Over Ramps
- Complete Break-A-Way System w/Charger
- Zip™ Breakaway Cable
- Radial Tires
- Spare Tire & Wheel- Standard Equipped
- XL Features (28' & Longer)
 - * Twist Guard™ to Reduce Unwanted Frame Torsion
 - * 16# I-Beam Frame Upgrade

DESCRIPTION

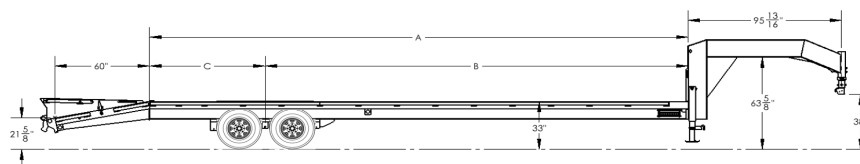

Dimensions			
Length	A	B	C
20'	240"	160"	80"
22'	264"	177"	87"
25'	300"	186"	114"
27'	324"	210"	114"
28'	336"	218"	118"

Dimensions			
Length	A	B	C
30'	360"	240"	120"
33'	396"	264"	132"
35'	420"	280"	140"
40'	480"	320"	160"