
STANDARD FEATURES

THESE ARE THE DEFAULT FEATURES THAT ARE INCLUDED IN THE BASE CONFIGURATION OF THIS MODEL

LD LOW-PRO FLATDECK WITH DUALS

w Inside Bed Width: 102"	Ⅲ Deck Height: 33"	Tail Types: Straight Deck, 5' Dovetail (Optional)	Frame Type: 12" x 19 lb. I-Beam
Lengths: 20'-44'	Couplers: Gooseneck	Axles: Tandem (2 x 10,000 lb., 12,000 lb., or 15,000 lb.)	+ Choose the optional Monster Ramps or Power Tail™ for
OVWR: 25,000 - 30,000 lbs.	Load Capacity: 16,250 - 24,370 lbs.	Ramp Types: Slide-In (Standard), Flip Over, Monster, Power Tail ™	easier loading and unloading.



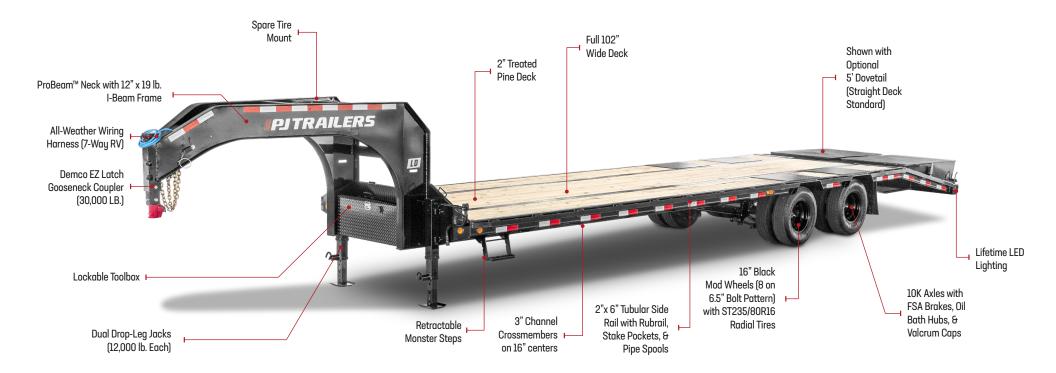

The TwistGuard™ provides T-shaped intersecting pipe supports to reduce frame twist and improve torque control. It is standard on models 30' and up or optional on shorter lengths.

TWISTGUARD™ FRAME DESIGN



This innovative feature utilizes lateral torsion supports, specifically engineered to counter rotational forces in the frame during operation. It is standard on models 30' and up or optional on shorter lengths.

FORMED PROBEAM™ GOOSENECK



The Demco EZ Latch Gooseneck Coupler is the first-of-its-kind, offering the reliability of Demco's EZ Latch system together with a custom housing for the ultimate in convenience to hitch up and qo.

DEMCO EZ LATCH GOOSENECK COUPLER



The Heavy Duty Adjustable suspension increases longevity and performance, is easier to maintain, and allows for adjustments when you need them.

HEAVY DUTY ADJUSTABLE

