

MORITZ

ELH GT

SERIES

TRAILERS & TRUCK BODIES



For God sent not his Son into the world to condemn the world; but that the world through him might be saved. John 3:17 KJV

BUILT
TO LAST
PERFORMANCE

TBA SERIES




DLH SERIES



ELH AR SERIES



FH SERIES




FH+10 SERIES



UDC SERIES



LRA SERIES



CR SERIES



ELBH - 22 GT 16000 LB GVWR

(16000 lb GVWR built with two 8000 lb axles)

- 17.5" Tires & Wheels
- 6'-6" Stationary Deck
- Aluminum Tool Box (standard)



Cold Formed
8" I Beam



Aluminum
Tool Box



Tilt Latch & Cylinder
Shut Off Valve



Rear Corner Tie Down



Tie Down
Between Fenders
(flush w/deck & fenders)



ELBH - 20 GT 14000 LB GVWR


- 4'-6" Stationary Deck
- Aluminum Tool Box (*standard*)



Heavy Duty
4" x 1/4" Bar
Stake Pockets



Step To
Access Deck

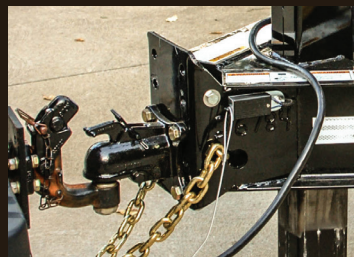

Heavy Duty
4 Bolt Adjustable
Coupler



Optional
Fender Tool Boxes
(ratchet boomer storage)



Optional
Hydraulic Jack

STANDARD SPECIFICATIONS

gravity tilt deck	16' long
stationary deck	20' model - 4'-6" long 22' model - 6'-6" long
deck height	22-1/2" to 23-1/2"
deck loading angle	13 degrees
between fenders	81-1/2"
frame	8" cold formed I-beam
stake pockets	4" x 1/4" formed bar
tool box	aluminum diamond plate
fenders	1/8" steel diamond plate
suspension	rubber ride (low maintenance)
brakes	electric (all wheels)
tires & wheels	12000 lb & 14000 lb GVWR - 16" 10 ply rated 8 bolt 16000 lb GVWR - 17.5" 16 ply rated 8 bolt
jack	12000 lb
coupler	2-5/16" adjustable (4 bolt)
safety chains	3/8" with latch hook
lights & wiring	LED lights & sealed wire harness
2 year limited warranty (see warranty for details)	

OPTIONS

fenders with built in tool boxes
hydraulic jack
pintle ring
pallet fork holder
aluminum wheels
spare tire & wheel

COLORS

black - red - charcoal

WEIGHT SPECIFICATIONS

Bumper Pull

Length	12000 GVWR	14000 GVWR	16000 GVWR
20'	3640 lbs	3660 lbs	4220 lbs
22'	3840 lbs	3860 lbs	4440 lbs

FRAME SPECIFICATIONS

frame & tongue		cross members		fenders		Tilt Deck	
one piece cold formed 8" I-beam		3" channel on 16" centers		1/8" steel diamond plate		4" x 7" x 3/8" angle	
18'		20'		22'			
GVWR	beam specs	GVWR	beam specs	GVWR	beam specs		
12000	8" @ 10 lb/ft	12000	8" @ 10 lb/ft	12000	8" @ 15 lb/ft		
14000	8" @ 10 lb/ft	14000	8" @ 10 lb/ft	14000	8" @ 15 lb/ft		
16000	8" @ 15 lb/ft	16000	8" @ 15 lb/ft	16000	8" @ 15 lb/ft		

AXLE SPECIFICATIONS (rubber ride suspension)

GVWR	axles
12000 lb	6000 lb with electric brakes & easy lube spindles
14000 lb	7000 lb with electric brakes & easy lube spindles
16000 lb	8000 lb with electric brakes & oil bath hubs

