

DTB MODEL REFRESH

Dual 6" I-Beam Dump Trailer



IRONBULL®
A NEW BREED OF TRAILERS

SAME TOUGH BULL



DTB REFRESH

Iron Bull DTB dump trailer beast models are built to work! Every DTB sits atop of a dual layer of 6" I-beam weighing in at 12 pounds per ft main frame construction. That's 24 lbs/ft of pure steel, putting maximum strength into the most critical part of your trailering system. Our 83" wide 14k bumper pull is by far our most popular model. With two 7k axles and tons of standard features, this model is a perfect fit for the contractor or weekend warrior.



BOX CAPACITY (CUBIC YARDS)

SIZE	BASE	3FT.	4FT.
5x10	2.8		
6x10	4.4	6.7	8.9
72x12	5.3	8.0	10.7
83x12	6.1	9.2	12.3
83x14	7.2	10.8	14.3
83x16	8.2	12.3	16.4

NEW AGGRESSIVE BODY DESIGN



STANDARD FEATURES


REFRESHED FEATURES

- NEW AGGRESSIVE BODY DESIGN W/ TOP RAIL REINFORCEMENT
- NEW FENDER STYLE
- NEW REAR GATE LATCH SYSTEM
- NEW STEP
- REVISED TOOLBOX & FRONT JACK BRACKET
- NEW SLIDE-IN RAMPS W/ PIN TAB

- Dual 6" I-Beam Frame (12lbs/ft)
- 7 Gauge Steel Flooring on 83" Wide Models
- 4" Tubing Bed Frame
- 3 x 3/16" Channel Crossmembers

- Full Length Bed Runners & Ramp Pockets
- 10 Gauge 18" or 24" Steel Sides
- Standard Retractable Tarp Kit
- 10k Drop-Leg Jack
- 2 5/16" Adjustable Coupler
- 2 7k Cambered Brake Axles (8k & Triple 7 Available)
- Multi-leaf Slipper Spring Suspension
- Black Mod Wheels
- Radial Tires
- Spare Tire Mount
- Slide-in Ramps
- Rear Support Stand Bracket
- Three-Way Spreader Gate

- Powdura Powder Coat & One Cure Primer
- Scissor Hoist with 516 Cylinder
- Double Acting Pump Unit w/ Gravity Down
- Flow Control Valve
- Locking Pump Box
- Standard Stake Pockets
- Weld On Diamond Plate Fenders
- Four Floor Mounted 5/8" D-Rings
- DOT Approved Lifetime LED Lighting
- Molded Sealed Harness with Resistors
- LED Voltage Indicator in Remote
- Built-In 5 amp Battery Charger
- 7-Way Receiver Female Plug w/ Adapter

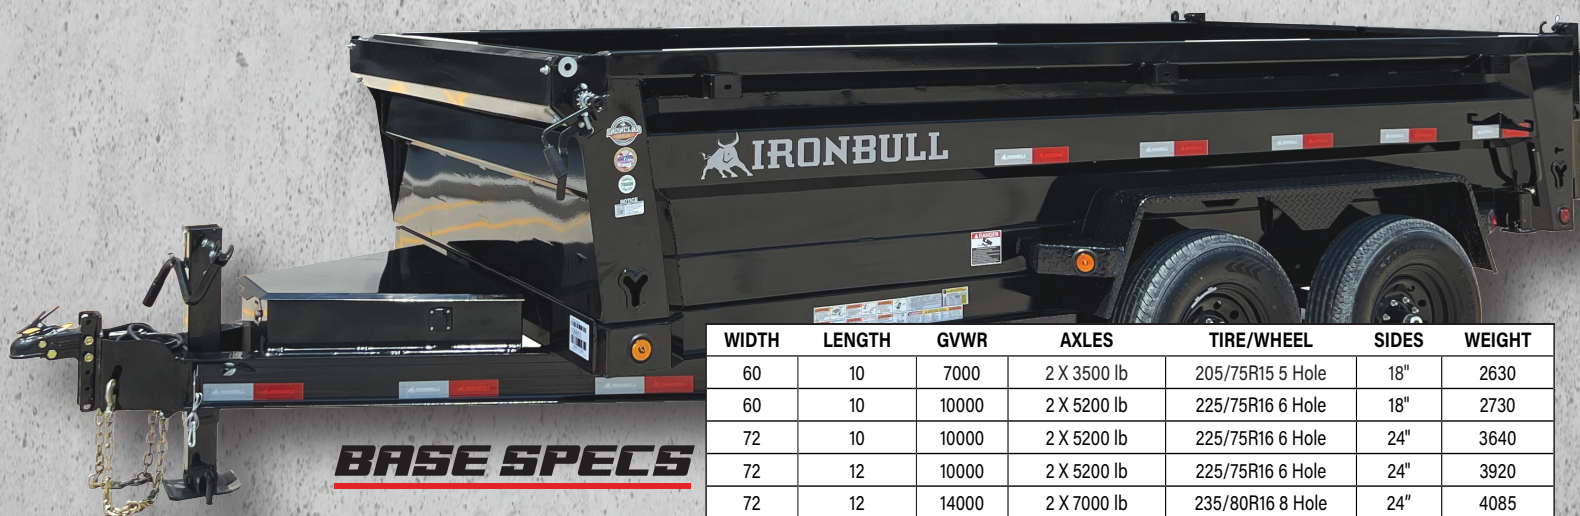

BASE SPECS

WIDTH	LENGTH	GVWR	AXLES	TIRE/WHEEL	SIDES	WEIGHT
60	10	7000	2 X 3500 lb	205/75R15 5 Hole	18"	2630
60	10	10000	2 X 5200 lb	225/75R16 6 Hole	18"	2730
72	10	10000	2 X 5200 lb	225/75R16 6 Hole	24"	3640
72	12	10000	2 X 5200 lb	225/75R16 6 Hole	24"	3920
72	12	14000	2 X 7000 lb	235/80R16 8 Hole	24"	4085
83	12	14000	2 X 7000 lb	235/80R16 8 Hole	24"	4425
83	14	14000	2 X 7000 lb	235/80R16 8 Hole	24"	4735
83	16	14000	2 X 7000 lb	235/80R16 8 Hole	24"	4825
83	16	21000	3 X 7000 lb	235/80R16 8 Hole	24"	5200

*WEIGHT OF UNITS ARE APPROXIMATES ONLY AND SUBJECT TO CHANGE DEPENDING ON OPTIONS



AGGRESSIVE
NEW BODY
DESIGN WITH
REINFORCED
TOP RAIL



NEW REAR GATE LATCH SYSTEM



DTB OPTIONAL FEATURES

CODE DESCRIPTION

V53	3 Stage Telescopic Cylinder
082	Tandem 8k Axles
S01	Rear Stabilizer Jacks
S61	3' Side Walls
S62	4' Side Walls
S90	Solar Charger (1.5Amp)
X90	24" Solid Side Extensions
R90	Wireless Remote
W91	Cold Weather Harness
J51	Hydraulic 10k Jack
V54	3-Way Pump



NORSTARCOMPANY.COM

MAIN PHONE NUMBER: 903-784-8900

DEALER HOTLINE: 844-466-7782