




Standard Features

- Fully Enclosed Wiring w/LED Lights
- Available in straight deck or beavertail
- Available with slide in or fold up ramps
- Spare tire and tool tray included
- High tensile steel I-beam crossmembers
- HSS Structural Tubing Frame
- HD Fir Decking
- Bolted Drop Leg Jacks
- Stake pockets and rub rail

Specifications

Axle:	(2) 7,000 lb Lippert Spring	Frame:	8 X 2 HSS
Suspension:	Multi-Leaf Spring w/ Equalizer	Ramp:	5ft Flip Over
Wheels:	235/80R16 E Steel	Crossmember:	3" I-Beam 80 KSI
Brakes:	Electric Self-Adjusting	Tongue:	8 X 2 HSS
Jack:	12,000 lb Side-Wind Bolted	Deck:	HD Fir Plank
Coupler:	21,000 lb Demco Adjustable	Electric Plug:	7 Wire Plug

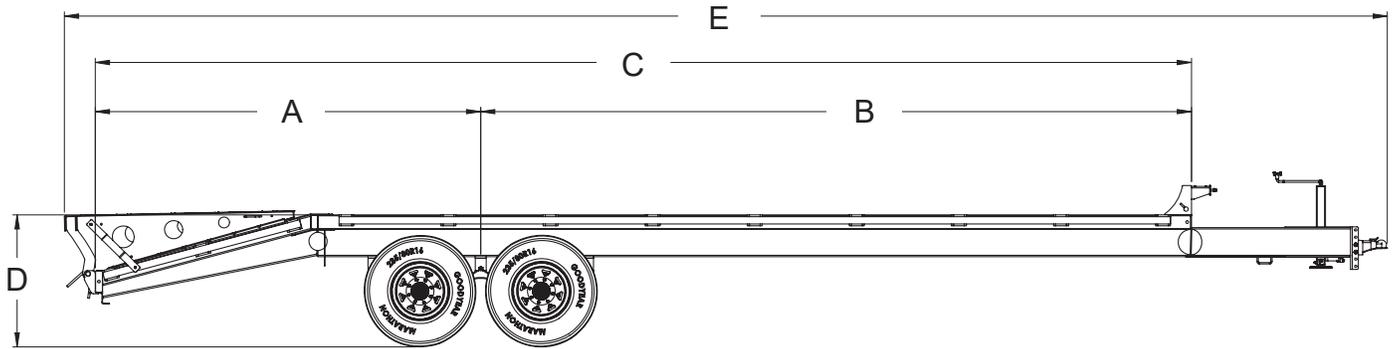

Dimensions

Model	A	B	C	D	E
HBAT7-20 BT	106 3/16"	193 9/16"	299 3/4"	31 5/8"	379 7/16"
HBAT7-25 BT	130 3/16"	229 9/16"	359 3/4"	31 5/8"	439 7/16"

Deck Width

97"

Model	Description	Net Weight	GVWR	Payload Cap.
HBAT7-20 BT	20' 7,000 lb. Tandem Axle Beavertail Black	3,821 lb.	15,400 lb.	11,579 lb.
HBAT7-25 BT	25' 7,000 lb. Tandem Axle Beavertail Black	4,054 lb.	15,400 lb.	11,346 lb.



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price con irmation on all Products. - Revised June 2024