

YDX TANDEM DUAL HYDRAULIC DOVETAIL

The YDX Hydraulic Dovetail Flatbed makes the ultimate push-button heavy equipment hauler. No ramps to mess with and some extra loading space on the dovetail make this trailer ideally suited for hauling farm equipment and bales, or other equipment.



PULL TYPE

Bumperpull /
Gooseneck



LENGTH

32' - 40'



GVWR

22,500 -
30,000 lb



WIDTH

102"



RAMPS

12'
HYDRAULIC



MORE OPTIONS

COUPLERS

30K ROUND GN COUPLER KING PIN
2 5/16" PLATE MOUNT ADJUSTABLE
COUPLER
30K ADJUSTABLE PINTLE EYE

JACKS

2 - 2-SPEED JOST JACKS
2 - HYDRAULIC JACKS

TONGUE/NECKS

STND HEIGHT I-BEAM NECK (OPT. W/
RISER BOX OR DECK-OVER)
6" EXTENDED HEIGHT RISERS NECK
(OPT. W/RISER BOX OR DECK-OVER)
I-BEAM TONGUE WITH TOOL TRAY OR
TOOLBOX

FRAMES

12" X 19LB I-BEAM FRAME WITH BRIDGE
AND TORQUE TUBE
12" X 22LB I-BEAM FRAME WITH
TORQUE TUBE
12" X 22LB I-BEAM FRAME WITH BRIDGE
AND TORQUE TUBE

CROSSMEMBERS

3" CHANNEL ON 12" CENTERS

DOVETAILS

12' HYD DOVETAIL W/DIAMOND PLATE
RUNNERS WITH TRAC BARS

AXLES

2-12K ELECTRIC BRAKE AXLES
2-12K ELECTRIC/HYDRAULIC BRAKE
AXLES
2-15K ELECTRIC/HYDRAULIC BRAKE
AXLES

SUSPENSIONS

RIDEWELL AIR SUSPENSION ON 2 AXLES
(OPT. W/FRONT LIFT AXLE)
RIDEWELL AIR RIDE WITH 72" SPREAD
AND FRONT LIFT AXLE
72" SPREAD ON ADJUSTABLE
SUSPENSION 2 AXLES

WHEEL/TIRES

ST235/85R16 G RADIAL TIRES ON DUALS
FOR 2-10/12K
ST215/75R17.5 H RADIAL TIRES ON
DUALS FOR 15K
ST215/75R17.5 H RADIAL TIRES ON
DUALS FOR 2-10/12K
ST235/75R17.5 I RADIAL TIRES ON
DUALS FOR 2-15K

FLOORS

2X8 OAK OR BLACKWOOD FLOOR

D-RINGS

EXTRA 3/4" BULL-NOSE D-RINGS

SLIDING RATCHETS

SLIDING RATCHET BAR ONLY
SLIDING RATCHET BAR WITH 1 RATCHET
PER 2' OR 4'
SLIDING RATCHET BARS ON BOTH SIDES

OTHER OPTIONS

DUNNAGE BOX
1x OR 2x 48" SIDE MOUNT TOOLBOXES
1x, 2x, OR 3x 48" SLIDING DRAWER SIDE
MOUNT BOXES
WINCH ROLLER
WINCH PLATE IN FRONT
8" WINCH CHANNEL BETWEEN RISERS
WARRIOR 17.5K OR 22K WINCH
MOUNTED ON PLATE/CHANNEL
WARRIOR 17.5K OR 22K WINCH IN NECK
7-WATT SOLAR PANEL
SECOND BATTERY
LOCKABLE CHAIN RACK IN NECK
2X REAR-FACING CARGO LIGHTS

STANDARD FEATURES

2 5/16" 30K ROUND GN COUPLER

2 - 10K DROP-LEG JACKS

STND HEIGHT I-BEAM NECK

12" X 19LB I-BEAM FRAME WITH TORQUE
TUBE

3" CHANNEL ON 16" CENTERS

6" CHANNEL OUTER FRAME

12' HYDRAULIC DOVETAIL

2-10K ELECTRIC BRAKE AXLES


ADJUSTABLE SUSPENSION ON 2 AXLES

ST235/80R16 E RADIAL TIRES ON DUALS

2X8 TREATED WOOD FLOOR

FLUSHMOUNT LED'S/STANDARD WIRING

WIRELESS REMOTE

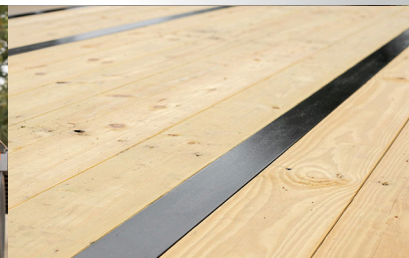

MAXX-D

WET BLACK(STND) INDIGO BLUE METALLIC RUBY RED METALLIC

ARMY GREEN

MAXX-D GRAY METALLIC

DESERT TAN

SIGNAL BLUE

FLAME RED

KAWASAKI GREEN