

## SL714-16K 7' x 14', 16,000 lb. Tandem Axle Dump Trailer



## **Standard Features**


- Stake Pockets and Rub Rails
- HD Front/Rear Side Steps
- 8K Slipper Spring Axles
- · 3-Way Gate
- Scissor Hoist Power Up / Power Down
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint

- Fully Enclosed Wiring
- HSS Structural Tubing
- Engineered Sill Design
- Spare Tire\*
- Aluminum Slide in Ramps\*
- Roll Up Tarp\*
- Rear Drop Down Stabilizer Jacks\*
- Side Boards\*

## **Specifications**

Axle:	(2) 8,000 lb Lippert Spring	Floor & Wall:	10GA Floor / 10GA Wall	
Hoist:	Champion CS615T 9 Ton	Frame:	6" X 2" X 0.188" HSS	
Jack:	12,000 lb Side Wind Jack Bolted	Lights:	LED	
Ramp:	4,500 lb Mid Span Aluminum	Electric Plug:	7 Wire RV	
Wheels:	235/85R16 F Steel	Safety Chains:	16,200 lb	
Tailgate:	Steel Three Way Barn/Spreader	Paint Specs:	PPG 2-Part Epoxy DTM	
Coupler:	21,000 lb Demco Adjustable	Dump Angle:	45°	

<sup>\*</sup>Dealer Specific Options

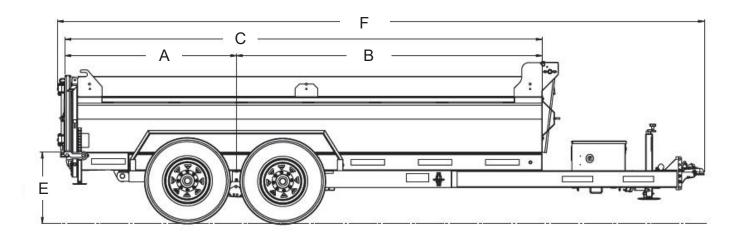

## **Dimensions**

Model	Α	В	С	D	Ε	F	Box Width
SL714-16K	60 1/2"	112 3/4"	173 1/4"	179"	25"	232 3/4"	82 1/2"

Model	Description	Net Weight	GVWR	Payload Cap.
SL714-16K	7' x 14' 16,000 lb. Tandem Axle Black/Charcoal	3,695 lb	17,385 lb	13,690 lb









