

SL510-10K 5' x 10', 10,000 lb. Tandem Axle Dump Trailer



Standard Features


- Stake Pockets
- Scissor Hoist Power Up / Power Down
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring

- HSS Structural Tubing
- Engineered Sill Design
- Spare Tire*
- Galvanized Steel Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- Side Boards*

*Dealer Specific Options

Specifications

| Axle: | (2) 5,200 lb. Lippert Spring | Floor & Wall: | 12ga Floor / 14ga Wall | |
|-----------|--|----------------|------------------------|--|
| Hoist: | Champion CS412T 5 Ton | Frame: | 4 X 2 HSS | |
| Jack: | 7,000 lb. Top-Wind Bolted | Lights: | LED | |
| Ramp: | (2) 2,500 lb. Midspan Ramps (47 lbs. each) | Electric Plug: | 7 Wire RV | |
| Wheels: | 225/75R15 D Steel | Safety Chains: | 16,200 lb. | |
| Tailgate: | Steel Barn Door | Paint Specs: | PPG 2-Part Epoxy DTM | |
| Coupler: | 21,000 lb. Demco Adjustable | Dump Angle: | 45° | |

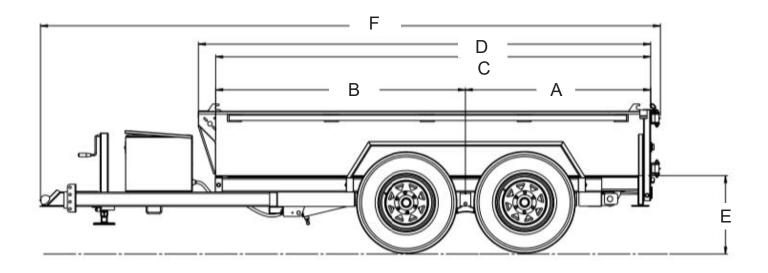

Dimensions

| Model | Α | В | С | D | Ε | F | Box Width |
|-----------|---------|-----|----------|----------|---------|------|------------------|
| SL510-10K | 51 1/2" | 70" | 121 1/2" | 126 1/4" | 21 3/4" | 173" | 62" |

| Model | Description | Net Weight | GVWR | Payload Cap. |
|-----------|--|------------|------------|--------------|
| SL510-10K | 5' x 10' 10,000 lb. Tandem Axle Black/Charcoal | 2,669 lb. | 11,400 lb. | 8,775 lb. |









